



# THK SUBMERSIBLE DEWATERING PUMP BH & BH+S- SERIES

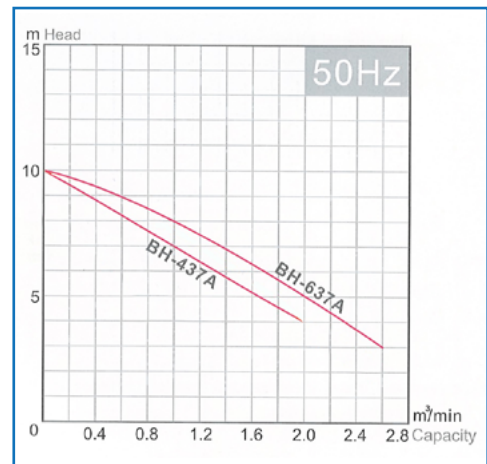

**SUBMERSIBLE PUMP BH & BH S-SERIES**

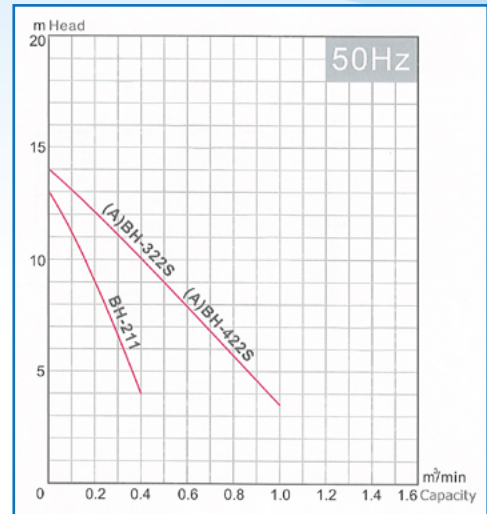

## Key Features:

- Two features (water delivery and extraction) in one design, it can be applied as a landed water pump by removing strainer and connecting a check valve.
- Water - cooling jacket design makes no overheat after long time operation, and impeller is designed regards to slicing concept for high water volume.

## Applications:

- Lifting of well water and underground water, aqua farm, agriculture irrigation, hydraulic engineering and drainage of subway..etc

Model	Output Hp (kw)	Discharge inch	Phase Ø	Pole	Head m	Capacity m <sup>3</sup> /min	Max Diameter mm	Height mm	Weight kg
BH - 211	1.5 (1.1)	2"	1Ø/3Ø	2	9	0.2	180	490	28
BH - 322S	3 (2.2)	3"	3Ø	2	9	0.5	245	530	45
BH - 422S	3 (2.2)	4"	3Ø	2	9	0.5	245	530	45
BH - 437A	5 (3.7)	4"	3Ø	4	7	1.0	270	680	70
BH - 637A	5 (3.7)	6"	3Ø	4	5	2.0	290	815	75